remove the wheel

unscrew

take off

pull out

unscrew the central nut

take off

unscrew the 4 screws

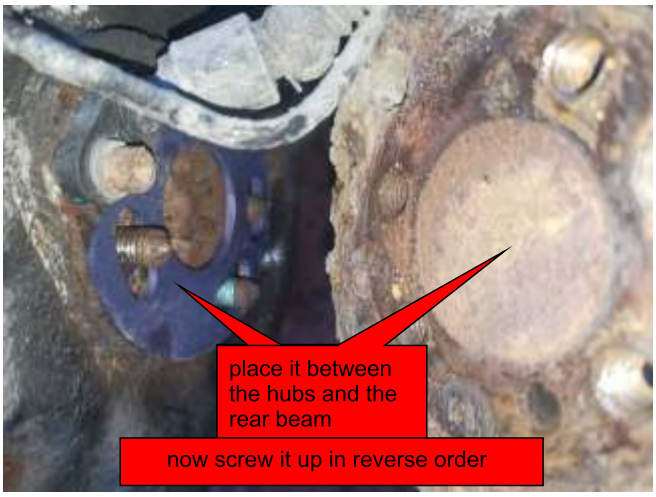
place it between the hubs and the rear beam
now screw it up in reverse order

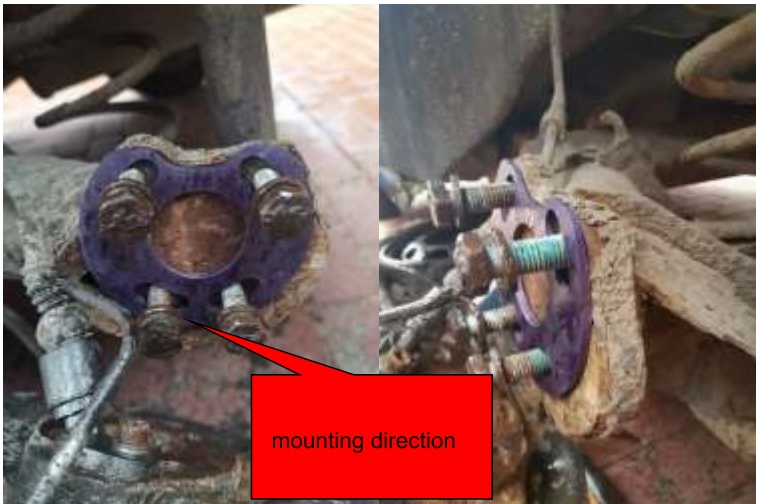
mounting direction